


Timbercore™

Severe Duty Solid Timber Door Core

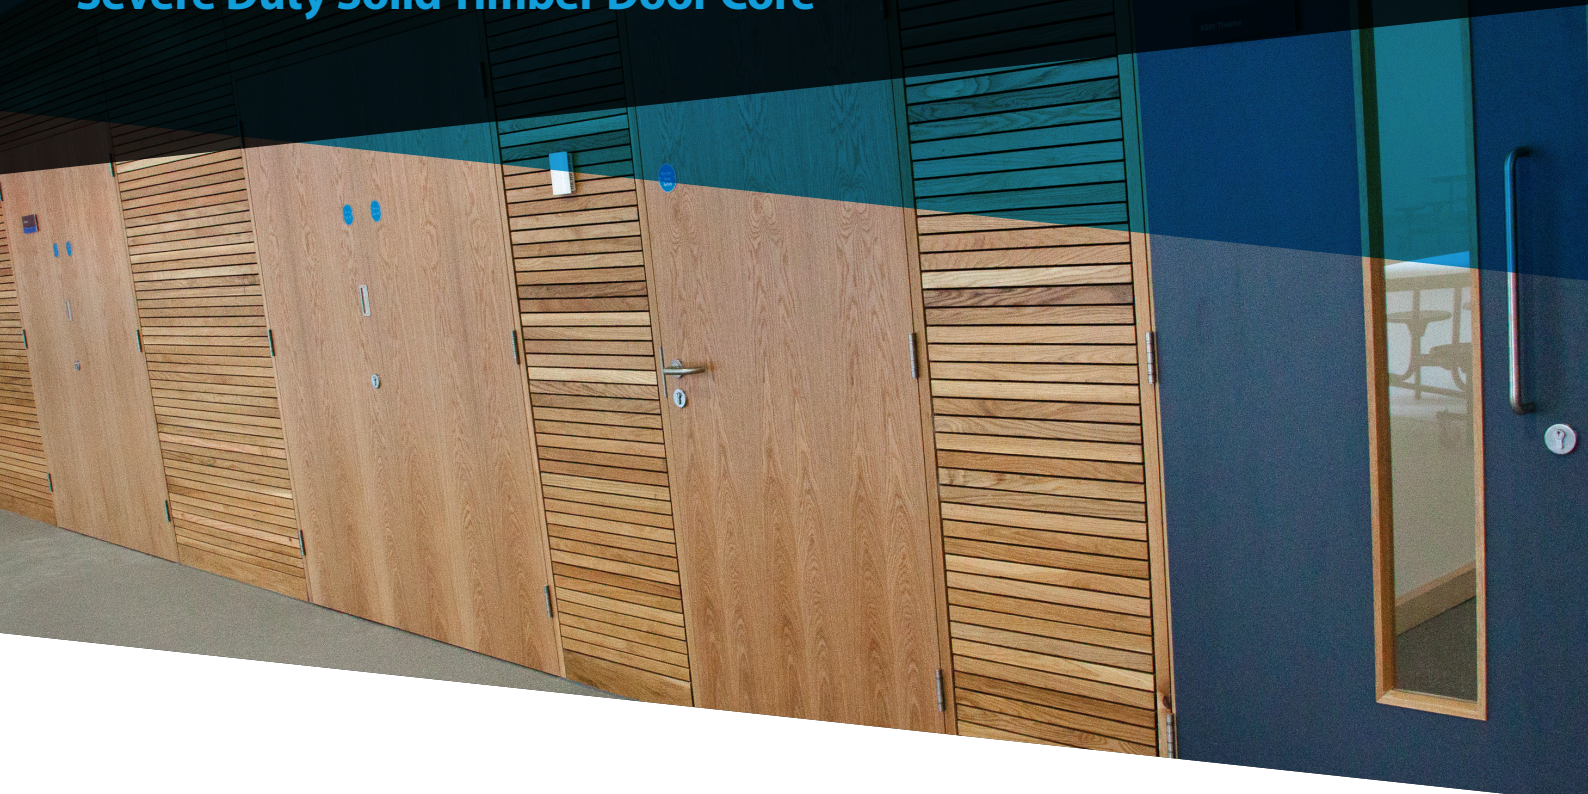

Traditional laminated softwood or hardwood core with MDF facings for internal use or plywood for external applications.

WHY SPECIFY TIMBERCORE™?

- **High Performance** - tested to achieve a severe duty rating for durability.
- **Suitable for External Use** - when faced with plywood
- **Flexibility in Design** - certification covers a wide range of door sizes, fire ratings, glazing and acoustic options.
- **Environmentally Friendly** - all materials are FSC certified and fully sustainable.



Environmental credentials	FSC certified
Independent third party certification	BM TRADA
Fire rating	Available in FD30 and FD60
Acoustic rating	Up to 35Rw dB

FD30 Specifications

Weight: 19.8 kg m²

Width: 44mm

U-Value (W/km²): 1.8

FD60 Specifications

Weight: 24.3 kg m²

Width: 54mm

U-Value (W/km²): 1.6

t 02392 389 076

e sales@ahmarra.co.uk

w www.ahmarra.co.uk

ahmarra